




Multipass Cooling Capstans



Features

- Flood or spray cooling
- Idler or driven models
- Viewing window
- Easy water drainage
- Ceramic wire supports
- 12" to 36" in diameter
- Optional disc brake
- Brushed stainless steel
- Multigroove wheels offers maximum cooling in minimum length
- Covered trough on all spray models
- Optional air wipers
- Easy to string up
- Easy to replace belts on driven units

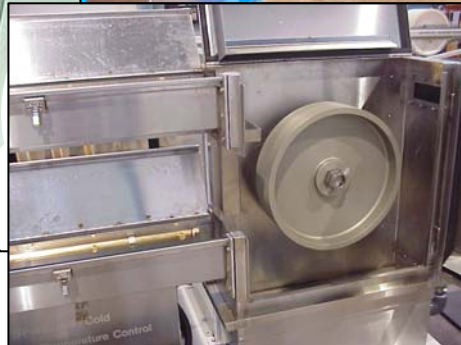



Multipass Cooling Capstan Models

MULTIPASS COOLING SYSTEMS						
Model Numbers	Description	Effective Cooling Length	Wheel Diameter	Wheel Groove Width	Passes Upper / Lower	Overall Length
LTM-12-110-H	High Speed Multipass Cooling System	110'	12"	5/8"	6/5	16'
		33.5 m	305 mm	16 mm		4.9 m
LTM-12-110-HC	High Speed Multipass Cooling System with Capstan	110'	12"	5/8"	6/5	16'
		33.5 m	305 mm	16 mm		4.9 m
LTM-12-220-H	High Speed Multipass Cooling System	220'	12"	5/8"	6/5	26'
		67 m	305 mm	16 mm		7.9 m
LTM-12-220-HC	High Speed Multipass Cooling System with Capstan	220'	12"	5/8"	6/5	26'
		67 m	305 mm	16 mm		7.9 m
LTM-12-190-H	High Speed Multipass Cooling System	190'	12"	1/4"	9/10	16'
		100.5 m	305 mm	16 mm		4.9 m
LTM-12-380-HC	High Speed Multipass Cooling System with Capstan	380'	12"	1/4"	9/10	26'
		115 m	305 mm	6.3 mm		7.9 m
LTM-12-760-HC	High Speed Multipass Cooling System with Capstan	760'	12"	1/4"	9/10	46'
		231 m	305 mm	6.3 mm		14 m
LTM-20-140-H	High Speed Multipass Cooling System	140'	20"	1 1/8"	4/3	26'
		42.7 m	508 mm	28 mm		7.9 m
LTM-20-140-HC	High Speed Multipass Cooling System with Capstan	140'	20"	1 1/8"	4/3	26'
		42.7 m	508 mm	28 mm		7.9 m
LTM-20-210-H	High Speed Multipass Cooling System	210'	20"	1 1/8"	4/3	36'
		64 m	508 mm	28 mm		11 m
LTM-20-210-HC	High Speed Multipass Cooling System with Capstan	210'	20"	1 1/8"	4/3	36'
		64 m	508 mm	28 mm		11 m
LTM-12-380-HC	High Speed Multipass Cooling System with Capstan	380'	12"	1/4"	9/10	26'
		115 m	305 mm	6.3 mm		7.9 m
LTM-12-760-HC	High Speed Multipass Cooling System with Capstan	760'	12"	1/4"	9/10	46'
		231 m	305 mm	6.3 mm		14 m
LTM-30-140-H	High Speed Multipass Cooling System	140'	28"	1 1/4"	38445	27'
		42.7 m	711 mm	32 mm		8.2 m
LTM-30-140-HC	High Speed Multipass Cooling System with Capstan	140'	28"	1 1/4"	38445	27'
		42.7 m	711 mm	32 mm		8.2 m
LTM-30-210-H	High Speed Multipass Cooling System	210'	28"	1 1/4"	38445	37'
		64 m	711 mm	32 mm		11.3 m
LTM-20-210-HC	High Speed Multipass Cooling System with Capstan	210'	28"	1 1/4"	38445	37'
		64 m	711 mm	32 mm		11.3 m
LTM-30-280-H	High Speed Multipass Cooling System	280'	28"	1 1/4"	38445	47'
		85.3 m	711 mm	32 mm		14.3 m
LTM-30-280-HC	High Speed Multipass Cooling System with Capstan	280'	28"	1 1/4"	38445	47'
		85.3 m	711 mm	32 mm		14.3 m
LTM-36-180	Multipass Cooling System	180'	36"	2"	38476	28.5'
		54.9 m	914 mm	50 mm		8.7 m
LTM-36-180-C	Multipass Cooling System with Capstan	180'	36"	2"	38476	28.5'
		54.9 m	914 mm	50 mm		8.7 m
LTM-36-270	High Speed Multipass Cooling System	270'	36"	2"	38476	38.5'
		82.3 m	914 mm	50 mm		11.7 m
LTM-36-270-C	Multipass Cooling System with Capstan	270'	36"	2"	38476	38.5'
		82.3 m	914 mm	50 mm		11.7 m
LTM-36-360	High Speed Multipass Cooling System	360'	36"	2"	38476	48.5'
		109.7 m	914 mm	50 mm		14.8 m
LTM-30-360-C	Multipass Cooling System with Capstan	360'	36"	2"	38476	48.5'
		109.7 m	914 mm	50 mm		14.8 m